




# GK11

INDUSTRIAL RANGE

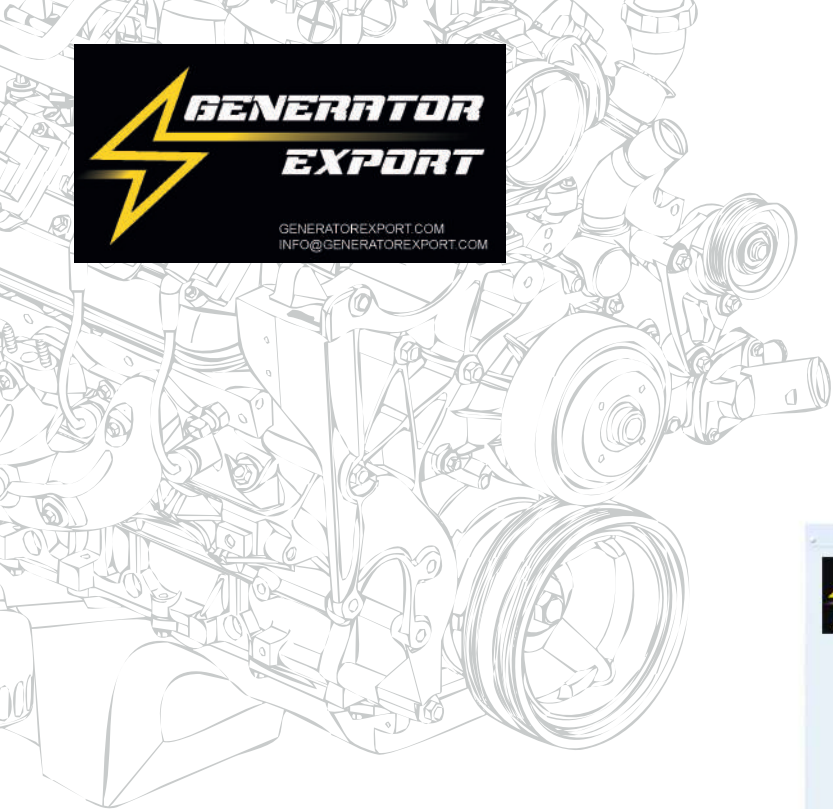

## GENERATING SETS

WATER COOLED 
 THREE PHASES 
 50 HZ 
 DIESEL

Service		Standby	Prime
Power	kVA	11	10
Power	kW	8,8	8
Rated Speed	r.p.m	1500	
Standart Voltage	V	400/230	
Rated At Power Factor	Cos Phi	0,8	

- 2006/42/EC Machinery safety.
- 2014/30/EU Electromagnetic compatibility.
- 2014/35/EU Electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2002/88/EC & 2004/26/EC)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2005 normative: 1000 mbar, 25°C, 30% relative humidity.  
 G2 class load acceptance in accordance with ISO 8528-5:2013

## SPECIFICATIONS



### Engine



### Alternator

#### Engine Specifications

Engine		Specifications
Standby Power/Prime Power	<i>kWm</i>	11,5 / 10,1
Brand / Origin		Kubota / Japan
Model		D1105-E2BG
Engine Type		4 Stroke - Diesel
Injection Type		Bosch type
Aspiration Type		Naturally Aspirated
Number of cylinder		3
Bore and Stroke	<i>mm</i>	78×78,4
Displacement	<i>L</i>	1,123
Cooling System		Water Cooling
Fuel Consumption 50% PRP	<i>l/h</i>	1,25
Fuel Consumption 75% PRP	<i>l/h</i>	1,85
Fuel Consumption 100 % PRP	<i>l/h</i>	2,47
Total oil capacity including tubes, filters	<i>L</i>	5.1
Engine coolant capacity	<i>L</i>	6
Governor	<i>Type</i>	Mechanical
Electric system voltage(V)	<i>V</i>	12

#### Alternator Specifications

Alternator		Specifications
Manufacturer		Leroy Somer
Model		TAL 040 B
Output Voltage	<i>V</i>	230/400
Frequency	<i>HZ</i>	50
Automatic Voltage Regulation	<i>±%</i>	1
Alternator Standby Power	<i>kVA</i>	14,6
Alternator Continuous Power	<i>kVA</i>	13,5
Power Factor	<i>Cosφ</i>	0,8
Number of Wires		12
Winding		2/3
Protection Class		IP23 / H
Excitation System		Self Excited
AVR Model		SX460
Performance - PF 0,8 / %75 Load	<i>%</i>	83

#### Prime Power (PRP):


According to ISO 8528-1:2005, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (P<sub>pp</sub>) over 24 h of operation shall not exceed 70 % of the PRP.

#### Emergency Standby Power (ESP):

According to ISO 8528-1:2005, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP.


**Note:** All data based on operation to ISO 3046/1, BS 5514 and DIN 6271 standard reference conditions

## DIMENSIONS

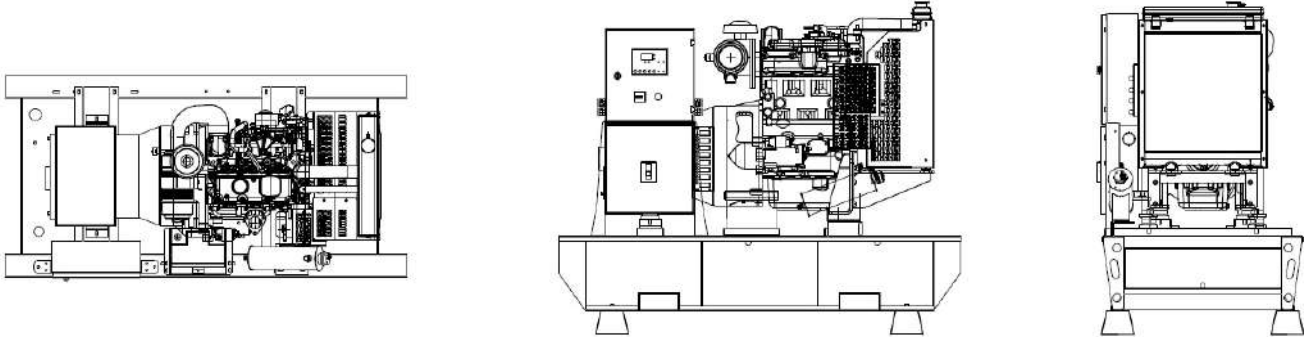

### OPEN SET

LxWxH	mm	1500x750x1100
Weight	kg	500
Fuel Tank	lt	70

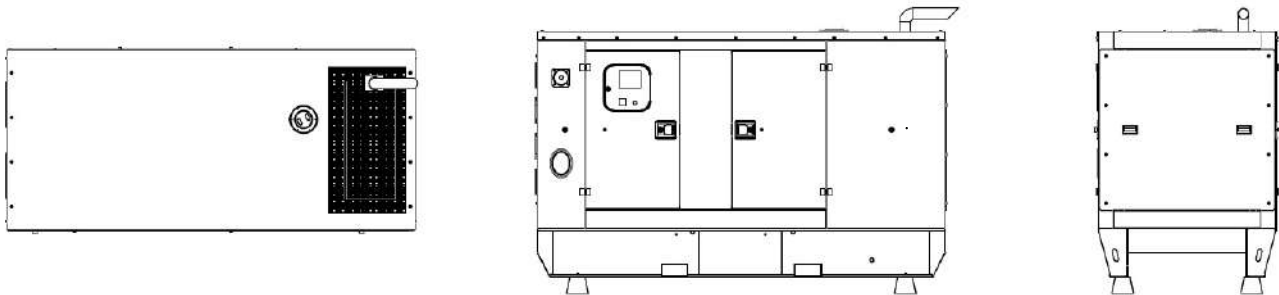

### CANOPIED

LxWxH	mm	1900x920x1180
Weight	kg	650
Fuel Tank	lt	70

#### Sound Proof Canopy

- Special design for minimizing acoustic level.
- Galvanized steel construction further protected by polyester powder coat paint.
- Black finish stainless steel locks and hinges.
- Control panel viewing window in a lockable access door.
- Emergency stop push button (red) mounted on enclosure exterior.
- Lifting, drag and jacking points on base frame.
- Radiator fill via removable, flush mounted rain cap fitted with compression seal.
- Acoustic insulation with moisture-repellent and non-flammable material

## CONTROL UNIT




Control Unit

### GB500 - DATAKOM

ATS unit with uninterrupted transfer	Internet Central Monitoring
AMF unit with uninterrupted transfer	SMS / E-mail message sending
Remote / Manuel start controller	Flexible with plug-in modules
Engine controller	Free PC software: Rainbow Plus
GSM-GPRS-GPS-Ethernet Port	Modbus RTU
8 configurable digital inputs	

## OPTIONAL EQUIPMENTS

### Some Optional Equipments with Generator Sets;

- Medium voltage alternator,
- Remote radiator applications,
- Automatic fuel filling system,
- Fuel tank, oil pan, dashboard, alternator, coil heaters,
- Alternator with double AVR and PMG,
- Synchronization systems, The generator output breaker,
- Grid-generator transfer switches,
- Accordance with the specific volume of demand-insulated cabins,
- Seismic solutions,
- Trailer,
- Remote monitoring.
- SMPS 12/24V 10A